


ARK LV Battery System







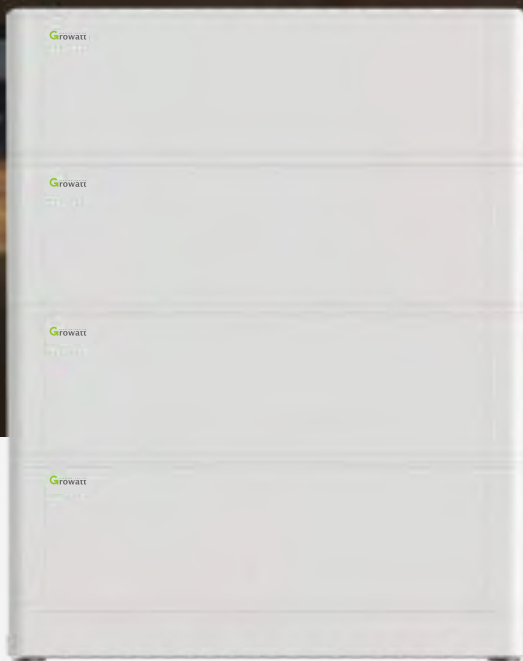



- Flexible capacity options, 2.56kWh to 25.6kWh
- Excellent safety of cobalt free LiFePO4 battery
- Easy installation with modular and stacked design
- Long lifespan, 10 years warranty
- Remote firmware upgrade



P O W E R
- I N G O
T O M O -
R R O W O



www.ginverter.com

Datasheet	ARK 2.5L	ARK 5.1L	ARK 7.6L	ARK 10.2L	ARK 12.8L	ARK 15.3L	ARK 17.9L	ARK 20.4L	ARK 23.0L	ARK 25.6L
System Demo										
Battery Module	ARK 2.5L-A1 (2.56kWh, 51.2V, 30kg)									
Number of Modules	1	2	3	4	5	6	7	8	9	10
Energy Capacity	2.56kWh	5.12kWh	7.68kWh	10.24kWh	12.8kWh	15.35kWh	17.92kWh	20.48kWh	23.04kWh	25.64kWh
Dimension (W/D/H)	650/260/170mm	650/260/340mm	650/260/510mm	650/260/680mm	650/260/850mm	650/260/1020mm	650/260/1190mm	650/260/1360mm	650/260/1530mm	650/260/1700mm
Weight	30kg	60kg	90kg	120kg	150kg	180kg	210kg	240kg	270kg	310kg
Max Charge/Discharge Current	25A	50A	75A	100A	100A	100A	100A	100A	100A	100A
General										
Battery Type	Cobalt Free Lithium Iron Phosphate (LFP)									
Nominal Voltage	51.2V									
Operating voltage Range	47.2 - 56.8V									
IP Protection	IP65									
Installation	Wall-mounted or Floor installation* ¹									
Operation Temperature	-10~45°C* ²									
Features										
DoD	90%									
Cycle Life	>6000									
BMS Monitoring Parameters	SOC, System voltage, current, cell voltage, cell temperature, PCBA temperature measurement									
Communication Port	CAN									
Warranty	10 Years									
Certification	IEC62619 (Cell&Pack), CE, CEC, RCM, UN38.3									

*1 Floor installation requires extra base (W/D/H=650/260/110 mm)

*2 The performance will be limited when the temperature is below 0°C

* ARK series battery has an EU model and a General model, the storage inverters sold in European countries only work with EU model ARK battery.

Growatt SPA1000~3000TL BL

- IP65 & Natural cooling
- Supports retrofit & New system
- Compatible with 1 & 3 phase system
- Workmodes programmable
- Online Smart Service



P O W E R
- I N G
T O M O R R O W
R R O W

powering tomorrow
Growatt

www.ginverter.com

Datasheet†	SPA1000TL BL	SPA2000TL BL	SPA3000TL BL
AC connection			
Rated AC apparent power	1000VA	2000VA	3000VA
Max. AC current	6A	10A	16A
AC nominal voltage (range)	230V (180V-270V)	230V (180V-270V)	230V (180V-270V)
AC grid frequency (range)	50Hz / 60Hz (±5Hz)	50Hz / 60Hz (±5Hz)	50Hz / 60Hz (±5Hz)
Power factor, configurable	1, 0.8leading...0.8lagging	1, 0.8leading...0.8lagging	1, 0.8leading...0.8lagging
THDi	<3%	<3%	<3%
AC connection	Single phase	Single phase	Single phase
AC output power (Back-up)			
Rated AC output apparent power	1000VA	2000VA	3000VA
Rated AC output voltage	230V	230V	230V
Rated AC output frequency	50Hz / 60Hz	50Hz / 60Hz	50Hz / 60Hz
Battery data			
Battery voltage range	42~59V	42~59V	42~59V
Max charging voltage	58V	58V	58V
Max charging and discharging current	24A	44A	66A
Peak charging and discharging power	1000W	2000W	3000W
Battery Type	Lithium /Lead-acid	Lithium /Lead-acid	Lithium /Lead-acid
Capacity of battery	50~2000AH	50~2000AH	50~2000AH
Efficiency			
Max. Charge efficiency	92.5%	94.0%	94.5%
Max. Discharge efficiency	92.0%	93.5%	94.0%
Protection devices			
Battery reverse protection	yes	yes	yes
Output over current protection	yes	yes	yes
Output over voltage protection-varistor	yes	yes	yes
Ground fault monitoring	yes	yes	yes
Grid monitoring	yes	yes	yes
Integrated all - pole sensitive leakage current monitoring unit	yes	yes	yes
General Data			
Dimensions (W / H / D) in mm	428/458/180	428/458/180	428/458/180
Weight	17kg	17kg	17kg
Operating temperature range	- 25°C ... +60°C	- 25°C ... +60°C	- 25°C ... +60°C
Noise emission (typical)	≤ 25 dB(A)	≤ 25 dB(A)	≤ 25 dB(A)
Altitude	2000m	2000m	2000m
Self-Consumption	<4W	<4W	<4W
Inverter Topology	transformerless	transformerless	transformerless
DC/DC topology	HF transformer	HF transformer	HF transformer
Cooling concept	Natural	Natural	Natural
Environmental Protection Rating	IP65	IP65	IP65
Relative humidity	100%	100%	100%
Features			
AC connection	connector	connector	connector
Battery connection	Screw	Screw	Screw
Display	LCD	LCD	LCD
Interfaces: RS485/ USB /CAN/WI-FI/RF	yes/yes/yes/opt/opt	yes/yes/yes/opt/opt	yes/yes/yes/opt/opt
Warranty:5 years/10 years	yes/opt	yes/opt	yes/opt

CE, IEC621109, G98, VDE0126-1-1, VDE-AR-N4105, CE 0-21, IEC62116&IEC61727, EN50438, AS4777, AS/NZS 3100