

# ME 3000SP

Designed For Storage System  
Uninterrupted Power Supply For Your Home



## Easy installation

- Compatible with existing grid-tied PV inverters.
- No need to upgrade distribution system.
- Uses a split-core CT, no need to disconnect the electrical grid at all .

## Simple and Reliable


- Exchanges energy via the electrical grid, no coupling with PV inverter, mature technology, simple and reliable.
- Can integrate with all grid-tied renewable systems, including solar, wind, fuel cell etc.

## Flexible solution

- Provides a full solution for energy consumers to maximize the use of their generated solar energy.
- Increases self-consumption rate (from 20% to 70%).
- User-adjustable battery charging current suits different types of batteries.

## Multiple modes

- Supports stand alone mode (like UPS), Ensure the safe operation of critical load.
- Programmable multiple operations modes: Grid tie, Off grid, and grid-tie with backup.

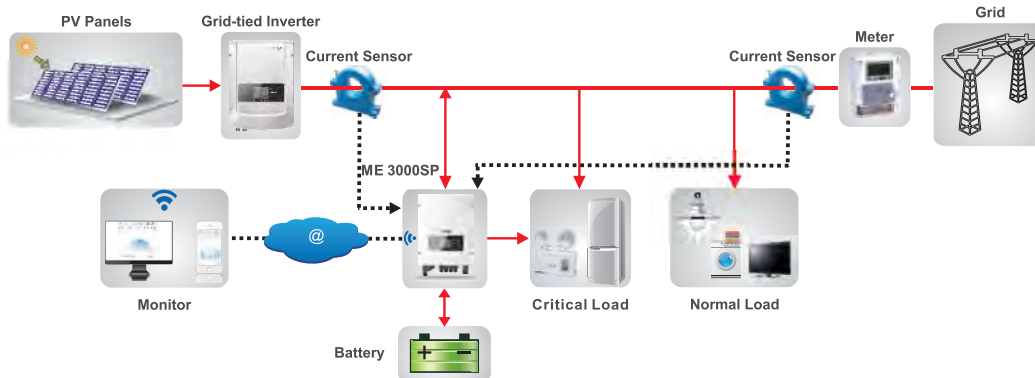

# MASS ENERGY INVERTER



ME 3000SP

## Datasheet

## ME 3000SP

### Battery Parameters

Battery Type	Lead-acid,Lithium-ion
Nominal battery voltage	48V
Battery voltage range	42-58V
Recommended battery capacity	200Ah (100~500Ah optional)
Recommended Storage capacity	9.6kWh
Max.Charging Current	60A
Charging Current Range	0-60A(Programmable)
Charging curve	3-stage adaptive with maintenance
Max.Discharging Current	60A
Electronic protection	OCP OTP OVP
Short circuit protection	Fuse (100A)
Discharge times (Hour)	Po=1kVA9.6h
	Po=3kVA3.2h
Depth of discharge	Lithium : 0~80%DOD adjustable
	Lead-acid:0~50%DOD adjustable

### AC Parameters

Max.Output Power	3kVA
Rated Input/Output Voltage	230V
Max.Input/Output Current	13A
AC Input/Voltage Range	180V-270V
Grid Frequency Range	44~55Hz / 54~66Hz
THD	<3%
Power Factor	1(Adjustable +/-0.8)
Connection phase	single
Current(inrush)	0.8A/1us
Maximum output fault current	100A/1us
Maximum output overcurrent protection	13A

### System Parameters

Max.Charging Efficiency	94.1%
Max.Discharging Efficiency	94.3%
Standby Losses	<5W
Topology	High Frequency Isolated Transformer
Degree Of Protection	IP65
Safety Protection	Anti islanding, RCMU, Ground Fault Monitoring
Certification	IEC 62116,IEC 61727,IEC 61683,IEC 60068(1,2,14,30),IEC62109-1/2,AS4777,VDE0126-1-1,G83/2,C10/11,RD1699,UTEC15-712-1,EN50438,VDE-AR-N4105
Communication	WiFi,RS485,CAN2.0

### Environmental

Ambient temperature range	-25°C...+60°C (Above 45°Derating)
Allowable Relative Humidity Range	0... 100%, No Condensing
Protective Class	Class I
Max.Operating Altitude	2000m
Current Sensor Connection	external

### General Data

Noise	<25dB
Weight	16kg
Cooling	Natural
Dimension(W*H*D)	532*360*173mm
Display	LCD display
Warranty	5 Years (Optional: extension to 10 years)

### Emergency Power Supply

EPS rated power	3000VA
EPS rated voltage, Frequency	230V,50/60Hz
EPS rated current	13A
Total harmonic distortion	<3%
Switch time	<3s



AS4777 G83/2 G59/3

CQC, IEC, VDE-AR-N4105 / VDE-0126, EMC, C10/11, EN50438, RD1669, CE1 0-21



# AMASS STORE BATTERY

GTX5000



Compatible with multi-brand storage inverters



Remote diagnosis and real-time data monitoring



Supports parallel expansion, supports up to 4 parallels



Certification of IEC62619, UN38.3, IEC62040-1, SAA etc



CATL brand battery, long cycle life (6000 times)



Wall-mounted or floor-mounted installation, time and cost saving



Han's Laser automated PACK production line, stable and reliable production quality



One-button automatic assignment battery module ID, simple and convenient operation

# Datasheet

# GTX5000

## Basic Parameters

Nominal Capacity	100AH
Nominal Voltage	51.2Vdc
Nominal Energy	5120Wh
Usable Energy (90% DOD)	4600Wh
Charge Voltage	55.68~56.16Vdc
Discharge Voltage	45.6~56.16Vdc
Nominal Charge Current	50A
Max. Charge Current	50A
Nominal Discharge Current	50A
Max. Discharge Current	75A (3.5 kW)
Communication	RS232、RS485、CAN
Working Temperature	-20 °C~ 60°C
Storage Temperature	≤ 25°C, 12 months
	≤ 35°C, 6 months
	≤ 45°C, 3 months
Operating Humidity	< 95% RH
Storage Humidity	< 95% RH
Max. Operating Altitude	≤ 2000m
Scalable	Up to 4
Degree Of Protection	Ip20
Weight	55Kg
Dimension (W*D*H)	480mm*211.5mm*600mm
Certificates	IEC62619、UN38.3、IEC62040-1、SAA etc
Cycle Life	6000 Cycles@ 80% DOD / 25°C / 0.5C, 60% EOL

## Hybrid Solar System

