





19.7% module efficiency

Enables reaching a higher output and lower specific installation and balance-of-system costs than with the same number of standard 60-cell modules.

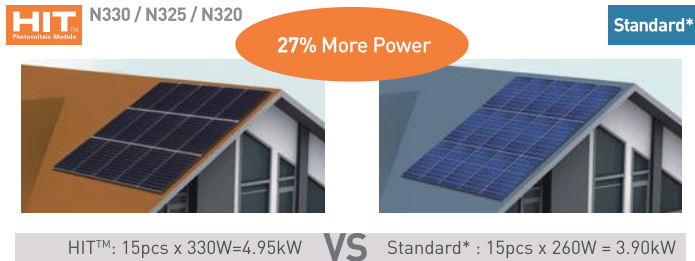


100% Panasonic design

Proudly featuring Panasonic's original invention, the heterojunction solar cell. With over 1 billion cells produced commercially over 20 years, 27 years after the breakthrough in the development and looking back to over 42 years of experience in solar, Panasonic really offers you a 25-year guarantee you can trust.

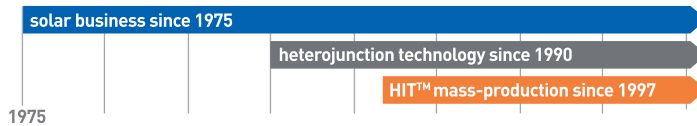


More energy, higher profit!

Helping you reach a higher final profit with your PV system!

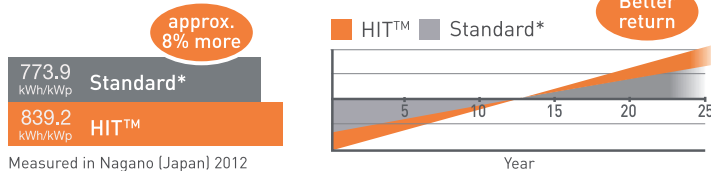

Standard* : Conventional crystalline module with Pmax 260W

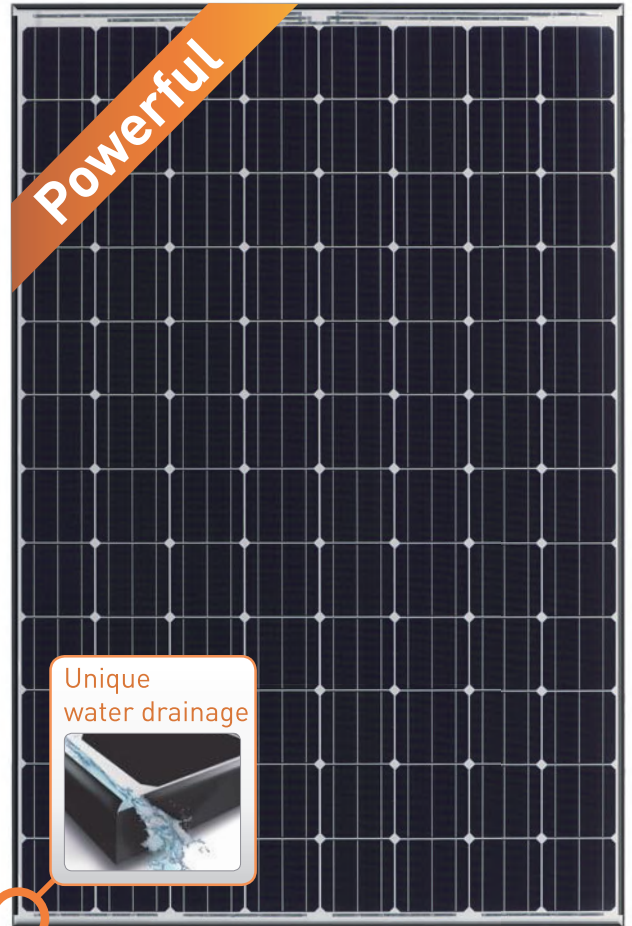

330W / 325W / 320W

High Efficiency + High Performance at High Temperatures = High Power Generation

QUALITY PROVEN 4 WAYS

1 Panasonic Quality


- IEC and over 20 Panasonic internal tests
- Vertically integrated own manufacturing (wafer, cell and module)



3 Less degradation on the field

14 years actual data prove a reliable and stable performance.

Installation: July, 2002
System size: 3.34kW
Location: Hyogo pre., Japan
Model: HIP-G751B1 [167W]
Direction: South

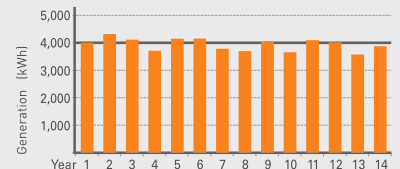

2 Record low claim rate

Less than 0.005% failure rate after more than 10 years experience in Europe (as of May 2017)

4 3rd Party verified

- Lifecycle testing (Long-Term-Sequential-Test) by TÜV Rheinland (tested on VBHN240SE10)
- PID-free (tested by Fraunhofer Institute)

HIT™ is a trademark of Panasonic Group.

Electrical data (at STC)

	VBHN330SJ47	VBHN325SJ47	VBHN320SJ47
Max. power (Pmax) [W]	330	325	320
Max. power voltage (Vmp) [V]	58.0	57.6	57.3
Max. power current (Imp) [A]	5.70	5.65	5.59
Open circuit voltage (Voc) [V]	69.7	69.6	69.4
Short circuit current (Isc) [A]	6.07	6.03	5.98
Max. over current rating [A]	15		
Power tolerance [%]	+10/-0 *		
Max. system voltage [V]	1000		
Solar Panel efficiency [%]	19.7	19.4	19.1

Note: Standard Test Conditions: Air mass 1.5; Irradiance = 1000W/m²; cell temp. 25°C
 * Maximum power at delivery. For guarantee conditions, please check our guarantee document.

Temperature characteristics

	VBHN330SJ47	VBHN325SJ47	VBHN320SJ47
Temperature (NOCT) [°C]	44.0	44.0	44.0
Temp. coefficient of Pmax [%/°C]	-0.258	-0.258	-0.258
Temp. coefficient of Voc [V/°C]	-0.164	-0.164	-0.163
Temp. coefficient of Isc [mA/°C]	3.34	3.32	3.29

At NOCT (Normal Operating Conditions)

	VBHN330SJ47	VBHN325SJ47	VBHN320SJ47
Max. power (Pmax) [W]	253.5	249.3	245.2
Max. power voltage (Vmp) [V]	56.5	56.1	55.7
Max. power current (Imp) [A]	4.56	4.52	4.47
Open circuit voltage (Voc) [V]	66.0	65.9	65.7
Short circuit current (Isc) [A]	4.91	4.88	4.84


Note: Normal Operating Cell Temp.: Air mass 1.5; Irradiance = 800W/m²; Air temperature 20°C; wind speed 1 m/s

At low irradiance (20%)


	VBHN330SJ47	VBHN325SJ47	VBHN320SJ47
Max. power (Pmax) [W]	63.5	62.3	61.0
Max. power voltage (Vmp) [V]	57.0	56.4	55.9
Max. power current (Imp) [A]	1.12	1.11	1.10
Open circuit voltage (Voc) [V]	65.6	65.3	64.9
Short circuit current (Isc) [A]	1.22	1.21	1.20

Note: Low irradiance: Air mass 1.5; Irradiance = 200W/m²; cell temp. = 25°C

Dependence on irradiance

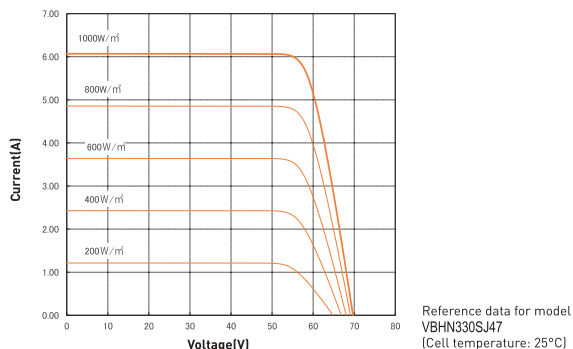

Dimensions and weight

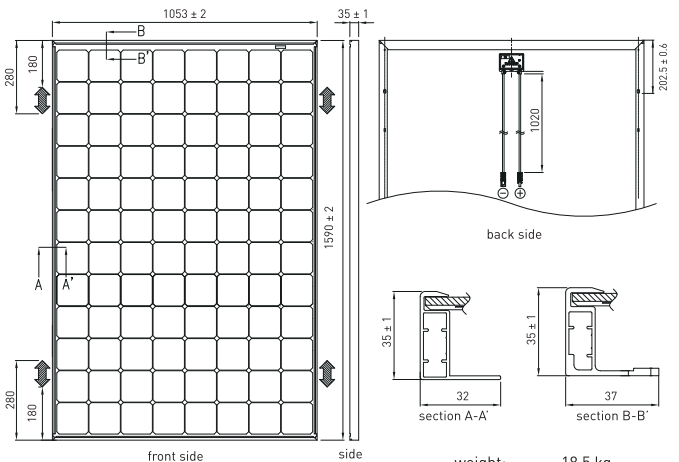

weight: 18,5 kg
 weight/m²: 11,3 kg/m²
 unit: mm
 Snow and Wind Load: 2400 Pa

Warranty

Power output: 10 years (90% of Pmin)
 25 years (80% of Pmin)
 Product workmanship: 10 years (based on warranty document)

Materials

Cell material: 5 inch photovoltaic cells
 Glass material: AR coated tempered glass
 Frame materials: Black anodized aluminium
 Connectors type: SMK

Certificates

IEC61215
 IEC61730-1
 IEC61730-2



IEC61701
 salt mist corrosion
 Severity 6

Please consult your local dealer for more information

CAUTION! Please read the installation manual carefully before using the products.

Used electrical and electronic products must not be mixed with general household waste. For proper treatment, recovery and recycling of old products, please take them to applicable collection points in accordance with your national legislation.